



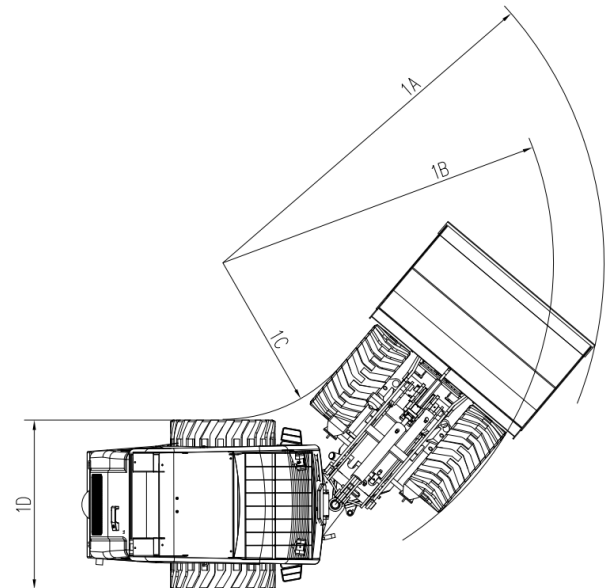

Tekniske specifikationer for BL35 LF Mini Læsser

Technical	BL35LF minilæsser
Engine data	
Brand	Perkins
Type	403J-17, STAGE V
Cylinder	3
Max.power (kW)	18.4
Rotation speed (rpm)	2800
Capacity (cm3)	1708
Cooling	Liquid
Weight	
Operating weight (standard with bucket) (Kg)	2600
Tipping load with bucket, machine straight	2000
Tipping load with bucket, machine articulated	1600
Tipping load with pallet fork, machine straight	1515
Tipping load with pallet fork, machine articulated	1212
Vehicle data	
Driving speed (km/h)	0-17
High low speed gear switching under load possible	Yes
Fuel tank capacity (L)	35
Hydraulic oil tank capacity (L)	28
Tires standard	27*10.5-15
Tires wider option	31*15.5-15
Hydraulic system	
Auxiliary oil flow (l/min)	47
Working pressure (bar)	205
Drive system pressure (bar)	350

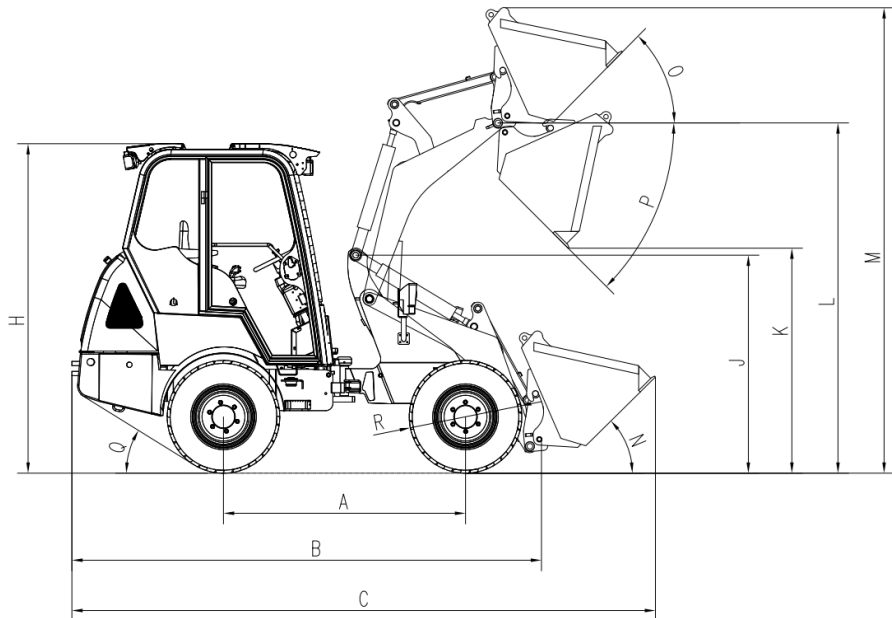

Dimension (mm)	
A Wheelbase	1699
B Front axle to hinge pin	510
C Rear overhang	1069
D Length without bucket	3292
E Length with bucket	4160
F Height to seat	1240
G Ground clearance	95
H Height to canopy top	2230
J Max. dump height	1567
K Max. height of horizontal bucket	2113
L Max. height of hinge pin	2390
M Max. operating height	3174
N Dump reach	283
O Bucket rollback at ground	38°
P Dump angle	48°
Q Bucket rollback at full height	43°
R Wheel tread	820
S Overall width	1080
T Ground clearance	202
U Inside turning radius	1181
V Radius at outer edge	2261
W Turning radius with bucket	2619
Y Inclination angle	45°
X Departure angle	28°

Bejco A/S, Viborgvej 742, 8471 Sabro

Tlf. 8692 4870

www.bejco.dk