



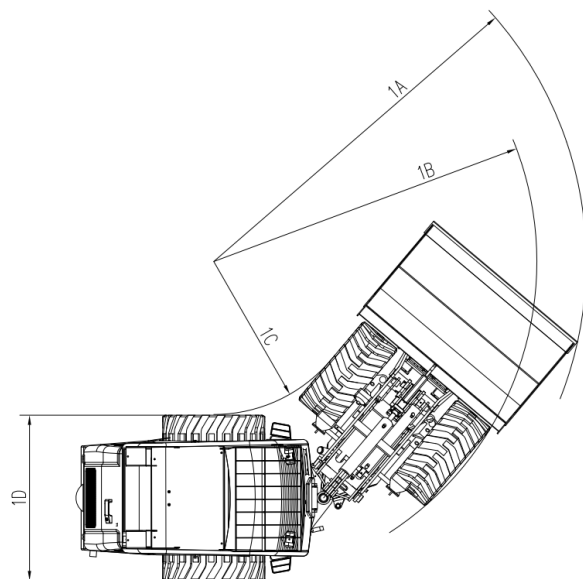

Tekniske specifikationer for BL40 LF Mini Læsser

Technical	BL40LF minilæsser
Engine data	
Brand	Yanmar
Type	4TNV88C, STAGE V
Cylinder	4
Max.power (kW)	34.3
Rotation speed (rpm)	2800
Capacity (cm3)	2190
Cooling	Liquid
Weight	
Operating weight (standard with bucket) (Kg)	2600
Tipping load with bucket, machine straight	2160
Tipping load with bucket, machine articulated	1620
Tipping load with pallet fork, machine straight	1715
Tipping load with pallet fork, machine articulated	1286
Vehicle data	
Driving speed (km/h)	0~20
High low speed gear switching under load possible	Yes
Fuel tank capacity (L)	59
Hydraulic oil tank capacity (L)	34
Tires standard	31*15.5-15
Hydraulic system	
Auxiliary oil flow (l/min)	47
Working pressure (bar)	205
Drive system pressure (bar) 行走系统压力	350

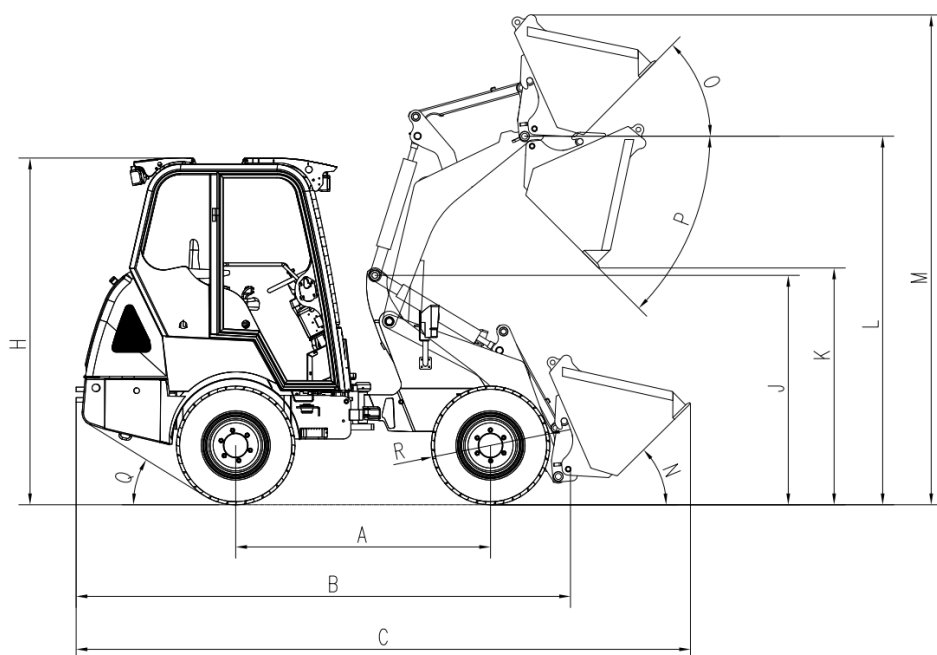

Dimension (mm)	
A Wheelbase	1699
B Front axle to hinge pin	528
C Rear overhang	1196
D Length without bucket	3416
E Length with bucket	4216
F Height to seat	1240
G Digging depth	95
H Height to canopy top	2291
J Max. dump height	1576
K Max. height of horizontal bucket	2244
L Max. height of hinge pin	2453
M Max. operating height	3260
N Dump reach	283
O Bucket rollback at ground	45°
P Dump angle	45°
Q Bucket rollback at full height	45°
R Wheel tread	820
S Overall width	1450
T Ground clearance	202
U Inside turning radius	1181
V Radius at outer edge	2495
W Turning radius with bucket	2877
Y Inclination angle	45°
X Departure angle	27°