



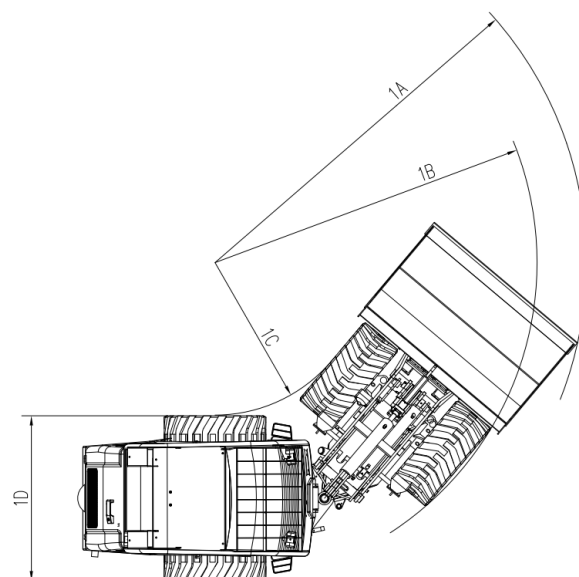

## Tekniske specifikationer for BL50 LF Mini Læsser

|                                                    |                   |
|----------------------------------------------------|-------------------|
| Technical                                          | BL50LF minilæsser |
| Engine data                                        |                   |
| Brand                                              | Yanmar            |
| Type                                               | 4TNV88C, STAGE V  |
| Cylinder                                           | 4                 |
| Max.power (kW)                                     | 34.3              |
| Rotation speed (rpm)                               | 2400              |
| Capacity (cm3)                                     | 2190              |
| Cooling                                            | Liquid            |
| Weight                                             |                   |
| Operating weight (standard with bucket) (Kg)       | 2990              |
| Tipping load with bucket, machine straight         | 2480              |
| Tipping load with bucket, machine articulated      | 1860              |
| Tipping load with pallet fork, machine straight    | 1415              |
| Tipping load with pallet fork, machine articulated | 1148              |
| Vehicle data                                       |                   |
| Driving speed (km/h)                               | 0~25              |
| High low speed gear switching under load possible  | Yes               |
| Fuel tank capacity (L)                             | 59                |
| Hydraulic oil tank capacity (L)                    | 34                |
| Tires standard                                     | 31*15.5-15        |
| Hydraulic system                                   |                   |
| Auxiliary oil flow (l/min)                         | 55                |
| Working pressure (bar)                             | 205               |
| Drive system pressure (bar)                        | 450               |

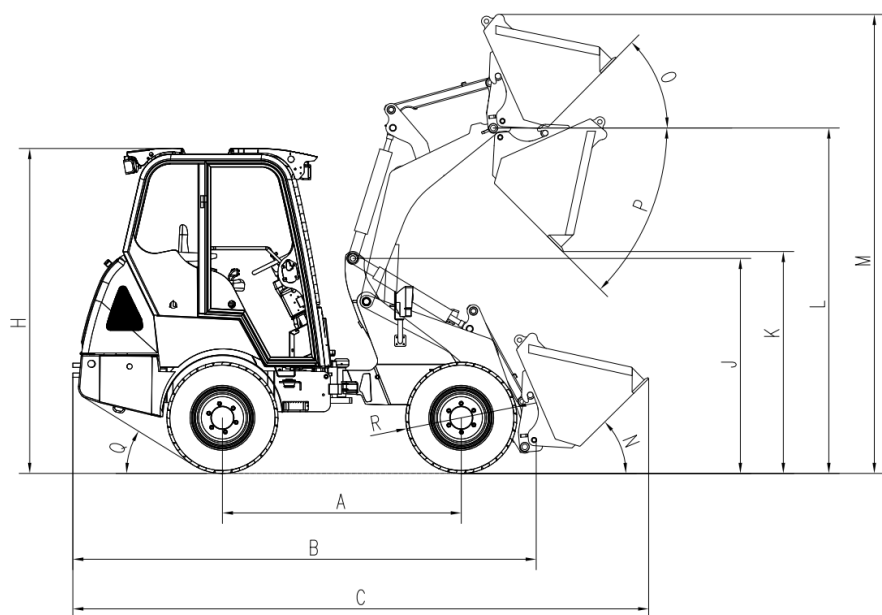

| Dimension (mm)                     |      |
|------------------------------------|------|
| A Wheelbase                        | 1733 |
| B Front axle to hinge pin          | 510  |
| C Rear overhang                    | 1196 |
| D Length without bucket            | 3695 |
| E Length with bucket               | 4547 |
| F Height to seat                   | 1360 |
| G Digging depth                    | 95   |
| H Height to canopy top             | 2291 |
| J Max. dump height                 | 1567 |
| K Max. height of horizontal bucket | 2113 |
| L Max. height of hinge pin         | 2390 |
| M Max. operating height            | 3174 |
| N Dump reach                       | 283  |
| O Bucket rollback at ground        | 38°  |
| P Dump angle                       | 48°  |
| Q Bucket rollback at full height   | 43°  |
| R Wheel tread                      | 1000 |
| S Overall width                    | 1332 |
| T Ground clearance                 | 252  |
| U Inside turning radius            | 965  |
| V Radius at outer edge             | 2344 |
| W Turning radius with bucket       | 2679 |
| Y Inclination angle                | 53°  |
| X Departure angle                  | 27°  |